
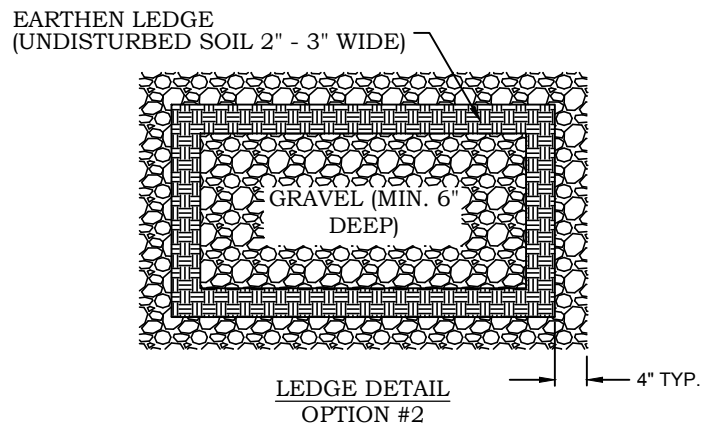


PROFILE VIEW

NOTE: OTHER TYPES OF INSTALLATION MAY BE NECESSARY DUE TO VARYING FIELD CONDITIONS. CONSULT WITH INSPECTOR BEFORE INSTALLING.

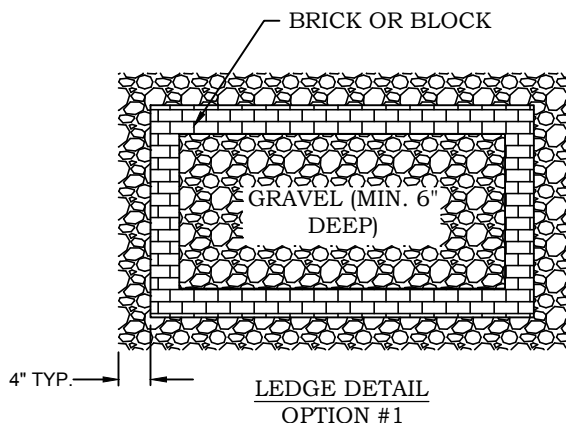

NOTES:

1. ASSEMBLY SHOULD BE CENTERED IN BOX TO ALLOW ACCESS FOR TESTING AND REPAIR.
2. BOX SHALL NOT REST ON WATER LINE.
3. ENTRY AND EXIT POINTS OF WATER LINE AND BRICK LEDGE MUST BE SEALED ON BOTH SIDES TO PREVENT ENTRY OF WATER AND DIRT.
4. MINIMUM CLEARANCE TO BE MAINTAINED: 8" TO 18" FROM ASSEMBLY TO TOP OF BOX, 6" FROM BOTTOM OF ASSEMBLY TO TOP OF GRAVEL.

NO REVISION OR MODIFICATION OF THIS DETAIL SHALL BE MADE WITHOUT PRIOR WRITTEN APPROVAL FROM AUGUSTA UTILITIES DEPARTMENT.

REVISED: JANUARY 2018

**DOUBLE CHECK VALVE ASSEMBLY  
ABOVE GROUND (2" AND SMALLER)**

**AUD DETAIL 5.2.2**

**AUGUSTA UTILITIES DEPARTMENT  
452 WALKER STREET, SUITE 200  
AUGUSTA, GA 30901**

