



PLAN VIEW

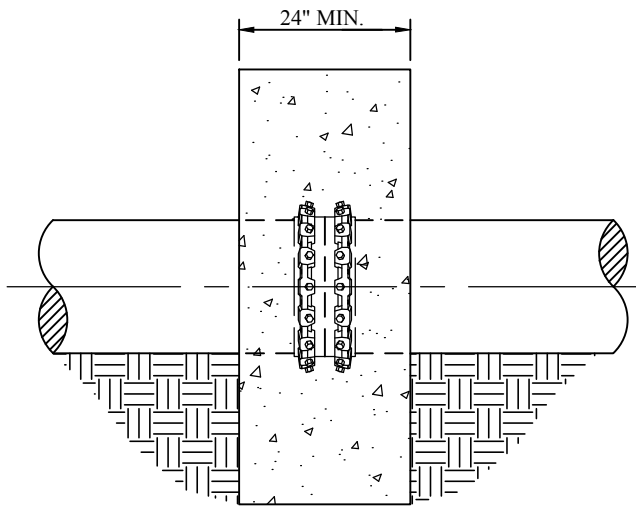

PROFILE VIEW

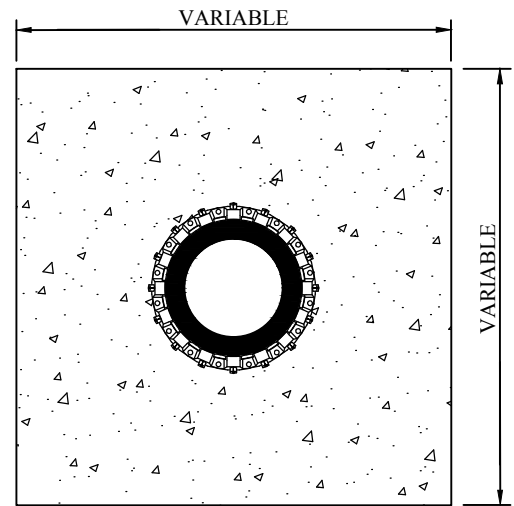

FRONT VIEW

MINIMUM CUBIC YARDS OF CONCRETE REQUIRED		
PIPE DIAMETER	200 PSI TEST PRES.	250 PSI TEST PRES.
6"	1.0	1.25
8"	2.0	2.25
10"	3.0	3.5
12"	4.0	5.0
16"	7.25	9.0

NOTES:

1. DETAIL IS TO BE A GUIDELINE FOR CAPPING WATER MAINS AND IS SUBJECT TO CHANGE DUE TO INDIVIDUAL PROJECT CIRCUMSTANCES PER AUD APPROVAL.
2. ALL FITTINGS SHALL BE MEGA-LUG.
3. ANCHOR BLOCKING TO BE POURED A MINIMUM OF 24 HOURS IN ADVANCE. AUD INSPECTOR WILL DIRECT WHEN WATER MAIN MAY BE CUT.
4. AUD INSPECTOR MUST BE PRESENT DURING INSTALLATION.
5. WATER SERVICE WILL BE INTERRUPTED DURING CONNECTION. SERVICE TO BE RESTORED IMMEDIATELY UPON COMPLETION.

NO REVISION OR MODIFICATION OF THIS DETAIL SHALL BE MADE WITHOUT PRIOR WRITTEN APPROVAL FROM AUGUSTA UTILITIES DEPARTMENT.

REVISED: JANUARY 2018

DEADMAN THRUST RESTRAINT WITH MASS WEIGHT BLOCKING

AUD DETAIL 1.15

**AUGUSTA UTILITIES DEPARTMENT
452 WALKER STREET, SUITE 200
AUGUSTA, GA 30901**

